

# HDS-35X



## Four-Post Lifts

SKU# 5175168

35,000-lb. Capacity, Heavy-Duty Truck Lift / Extended

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 6AM to 4:30PM PST

## The Only Heavy-Duty Truck Lift You'll Ever Need

Get ready to lift some massive vehicles. If you need a 35,000-lb. capacity [four-post truck lift](#) that's a little longer, the HDS-35X is just the ticket to smoothly handle wide wheel bases, extended dimensions and virtually every truck in this weight class. Email or call BendPak customer service to discuss your specific lifting needs. Always make sure you get the right car lift for your specific lifting needs.



## Choose Standard Length

SKU#	Model	Description
5175168	HDS-35	Standard Length

## Features

- 35,000-lb. lifting capacity
- Standard length runways available
- Supersized 12" diameter cable sheaves
- Stainless steel lifting cables
- Grease nipples
- Single hydraulic under-runway cylinder
- Integrated flow restrictor
- Durable powder coat
- Spring-loaded safety locks
- Second lock system on constant guard
- Fully enclosed lifting cables
- Multiple adjustable height locking positions
- Maintenance-free electric hydraulic power system
- Conveniently positioned operator controls
- 12" x 12" base plates
- Non-skid runways
- Optional rolling jacks

Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2011 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).

### Extended Runways

We extend the runways on our heavy-duty truck lifts to keep your cargo safe. Steep ramps sometimes cause drivers to accidentally hit the pedal too hard and overshoot their target. A gradual climb maximizes loading and unloading convenience, as well as safety.

### Dual-hub cable sheaves

Simply put, bigger sheaves and sheave axles make for a sturdier, safer and more powerful car lift. We build our four-post lift sheaves 12" in diameter, accompanied by 4" diameter sheave axles. You can expect low-maintenance and high-functioning parts for many years to come.

### Heavy-duty aircraft cable



Our 1/2" diameter, 6 x 25 stainless-steel lifting cables have a 14,000-lb. breaking strength per cable. The four cables alone, without the hydraulic cylinder, offer more than enough power to safely lift your 35,000-lb. truck. We over-engineer our components and proudly wear our ALI Certification on the columns of our four-post lifts for all the world to see.

### Built-in lubrication

Grease nipples are useful devices because they make the HDS-35X a self-lubricating, auto-maintaining powerhouse. This massive car lift reduces your costs by giving you quality parts, like self-lubricating sheaves, which require only periodic attention.

### Large base plates

Truck lift base plates are made a little wider than the bases of our lighter-duty four-post lift models: 12" x 12" plate dimensions are sturdy and can be easily bolted into suitable concrete flooring for years.

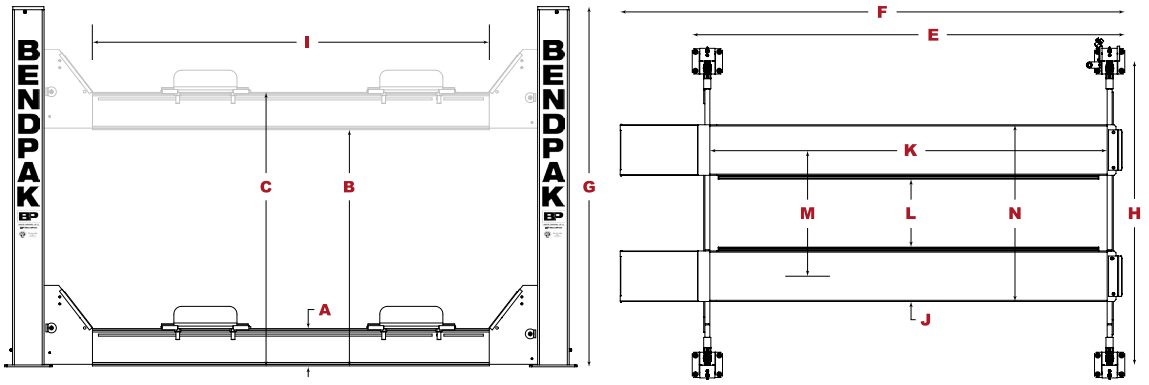

An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2011 or ANSI/UL 201. Consult [www.autolift.org](http://www.autolift.org) for a complete list or contact BendPak via [contact@bendpak.com](mailto:contact@bendpak.com).

Model	HDS-35	HDS-35X	HDS-40	HDS-40X
SKU#	5175166	5175168	5175176	5175178
Lifting Capacity	35,000 lbs. (15,876 kg)	35,000 lbs. (15,876 kg)	40,000 lbs. (18,144 kg)	40,000 lbs. (18,144 kg)
<b>A - Min. Runway Height</b>	8.5" (216 mm)	8.5" (216 mm)	8.5" (216 mm)	8.5" (216 mm)
<b>B - Max. Rise</b>	60" (1,524 mm)	60" (1,524 mm)	60" (1,524 mm)	60" (1,524 mm)
<b>C - Max. Lifting Height</b>	68.5" (1,740 mm)	68.5" (1,740 mm)	68.5" (1,740 mm)	68.5" (1,740 mm)
<b>D - Overall Width</b>	154" (3,912 mm)	154" (3,912 mm)	154" (3,912 mm)	154" (3,912 mm)
<b>E - Outside Length</b>	257" (6,528 mm)	317" (8,052 mm)	257" (6,528 mm)	317" (8,052 mm)
<b>F - Overall Length</b>	297" (7,544 mm)	357" (9,068 mm)	297" (7,544 mm)	357" (9,068 mm)
<b>G - Height of Columns</b>	93" (2,362 mm)	93" (2,362 mm)	93" (2,362 mm)	93" (2,362 mm)
<b>H - Width Between Columns</b>	134" (3,404 mm)	134" (3,404 mm)	134" (3,404 mm)	134" (3,404 mm)
<b>I - Drive-Thru Clearance</b>	109" (2,769 mm)	109" (2,769 mm)	109" (2,769 mm)	109" (2,769 mm)
<b>J - Runway Width</b>	28" (711 mm)	28" (711 mm)	28" (711 mm)	28" (711 mm)
<b>K - Length of Runways</b>	263" (6,680 mm)	323" (8,204 mm)	263" (6,680 mm)	323" (8,204 mm)
<b>L - Width Between Runways</b>	36" (914 mm) - 47" (1,194 mm)	36" (914 mm) - 47" (1,194 mm)	36" (914 mm) - 47" (1,194 mm)	36" (914 mm) - 47" (1,194 mm)
<b>M - Runway Centerline</b>	64" (1,625 mm) - 75" (1,905 mm)	64" (1,625 mm) - 75" (1,905 mm)	64" (1,625 mm) - 75" (1,905 mm)	64" (1,625 mm) - 75" (1,905 mm)
<b>N - Outside Edge of Runways</b>	92" (2,367 mm) - 103" (2,616 mm)	92" (2,367 mm) - 103" (2,616 mm)	92" (2,367 mm) - 103" (2,616 mm)	92" (2,367 mm) - 103" (2,616 mm)
<b>Min Wheelbase @ Rated Capacity</b>	185" (4,699 mm)	230" (5,842 mm)	185" (4,699 mm)	230" (5,842 mm)
<b>Min Wheelbase @ 75% Capacity</b>	160" (4,064 mm)	195" (4,953 mm)	160" (4,064 mm)	195" (4,953 mm)
<b>Min Wheelbase @ 50% Capacity</b>	135" (3,429 mm)	165" (4,191 mm)	135" (3,429 mm)	165" (4,191 mm)
<b>Min Wheelbase @ 25% Capacity</b>	110" (2,794 mm)	130" (3,302 mm)	110" (2,794 mm)	130" (3,302 mm)
<b>Locking Positions</b>	9	9	9	9
<b>Lock Spacing</b>	every 6" (152 mm)	every 6" (152 mm)	every 6" (152 mm)	every 6" (152 mm)
<b>Lifting Time</b>	75 sec	75 sec	75 sec	75 sec
<b>Motor</b>	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph	220 VAC / 60 Hz / 1 Ph